
## **Estimated Performance Curve**

Sheet No.	
Customer	
Item No.	
Date	2017-03-07

	SPECIFICATION						
	Capacity	100 lpm at 20 m		OUTPUT	0.75KW		
	Total Head	20 m		VOLTAGE	220/380V		
Δ	SUCTION BORE	30 mm		30 mm		FREQUENCY	60Hz
P	DISCHARGE BORE	25 mm		SPEED	3450rpm		
	LIQUID	WATER		TYPE	TEFC		
	MAKER	WILO		MAKER	WILO		

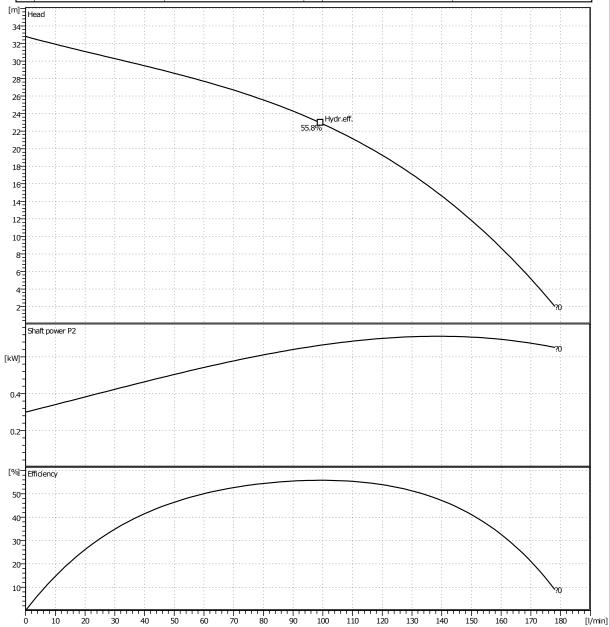



- \*Performance curve of some models is subject to have 10  $\!\%$  deviation.
- \*Subject to change without prior notice.

TYPE	Horizontal Multi-stage
MODEL	MHI-402i
SERVICE	

## **Outline Drawing**

Sheet No.	
Customer	
Item No.	
Date	2017-03-07

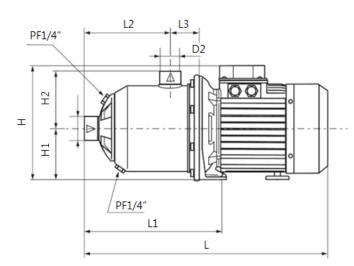



단위 : mm

Power Source	Н	H1	H2	L	L1	L2	L3	L4	D1	D2
	200	90	104	354	204	109.5	51	106	30	25
M (1~, 220V,60Hz)	200	90	104	380	204	109.5	51	106	30	25
	228	90	104	428	252	157.5	51	120	30	25
т	192	90	104	354	204	109.5	51	-	30	25
(3~,220/380,	223	90	104	380	204	109.5	51	-	30	25
60Hz)	223	90	104	428	252	157.5	51	-	30	25
N (3~,440V,60Hz)	223	90	104	428	252	157.5	51	-	30	25
	223	90	104	428	276	181.5	51	-	30	25
	M . (1~, 220V,60Hz) I . (3~,220/380, 60Hz) N	M (1~, 220V,60Hz) 200 228 I 192 (3~,220/380, 60Hz) 223 N 223 (3~.440V,60Hz)	M (1~, 220V,60Hz) 200 90 228 90 192 90 (3~,220/380, 60Hz) 223 90 N 223 90 (3~,440V,60Hz)	M (1~, 220V,60Hz) 200 90 104 228 90 104 192 90 104 192 90 104 (3~,220/380, 60Hz) 223 90 104 N 223 90 104 (3~,440V,60Hz)	M (1~, 220V,60Hz) 200 90 104 354 200 90 104 380 228 90 104 428 192 90 104 354 354 354 354 354 354 354 354 354 35	M (1~, 220V,60Hz) 200 90 104 354 204 208 90 104 380 204 228 90 104 428 252 192 90 104 380 204 204 200 228 90 104 354 204 204 204 200 223 90 104 380 204 200 223 90 104 428 252 N 223 90 104 428 252 (3~,440V,60Hz)	M (1~, 220V,60Hz) 200 90 104 354 204 109.5 228 90 104 428 252 157.5 I (3~,220/380, 60Hz) 223 90 104 428 252 157.5 N 223 90 104 428 252 157.5 (3~,440V,60Hz) 223 90 104 428 252 157.5	200   90   104   354   204   109.5   51     (1~, 220V,60Hz)   200   90   104   380   204   109.5   51     228   90   104   428   252   157.5   51     192   90   104   354   204   109.5   51     (3~,220/380, 60Hz)   223   90   104   380   204   109.5   51     N   223   90   104   428   252   157.5   51     (3~,440V,60Hz)   223   90   104   428   252   157.5   51     (3~,440V,60Hz)   200   200   200   200   200   200     (3~,440V,60Hz)   200   200   200   200   200   200     (3~,440V,60Hz)   200   200   200   200   200     (3~,440V,60Hz)   200   200   200   200   200   200     (3~,440V,60Hz)   200   200   200   200   200   200   200     (3~,440V,60Hz)   200   200   200   200   200   200   200   200   200     (3~,440V,60Hz)   200	N   223   90   104   354   204   109.5   51   106     104   207   207   207   207   207   207     105   228   90   104   428   252   157.5   51   120     105   228   90   104   354   204   109.5   51   - 107     105   228   90   104   354   204   109.5   51   - 107     105   228   90   104   380   204   109.5   51   - 107     105   228   90   104   428   252   157.5   51   - 107     105   228   90   104   428   252   157.5   51   - 107     105   228   90   104   428   252   157.5   51   - 107     105   228   228   228   228   228   238   238     105   228   238   238   238   238   238     105   238   238   238   238   238     105   238   238   238   238   238     105   238   238   238   238     105   238   238   238   238     105   238   238   238   238     105   238   238   238     105   238   238   238     105   238   238     105   238   238     105   238   238     105   238   238     105   238   238     105   238   238     105   238   238     105   238   238     105   238   238     105   238   238     105   238     10	N

TYPE	Horizontal Multi-stage
MODEL	MHI-402i
SERVICE	