
Estimated Performance Curve

| Sheet No. | |
|-----------|------------|
| Customer | |
| Item No. | |
| Date | 2017-03-07 |

| | SPECIFICATION | | | | | | |
|----|----------------|-----------------|---|-----------|----------|--|--|
| | Capacity | 100 lpm at 65 m | | OUTPUT | 2.2KW | | |
| | Total Head | 65 m | ~ | VOLTAGE | 220/380V | | |
| Δ | SUCTION BORE | 30 mm | | FREQUENCY | 60Hz | | |
| PU | DISCHARGE BORE | 25 mm | | SPEED | 3450rpm | | |
| | LIQUID | WATER | Σ | TYPE | TEFC | | |
| | MAKER | WILO | | MAKER | WILO | | |

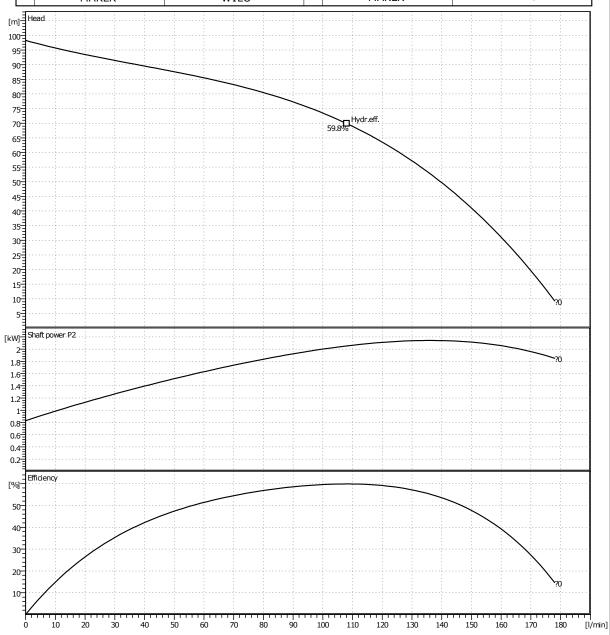



- *Performance curve of some models is subject to have 10 $\!\%$ deviation.
- *Subject to change without prior notice.

| TYPE | Horizontal Multi-stage |
|---------|------------------------|
| MODEL | MHI-406i |
| SERVICE | |
| | |

Outline Drawing

| Sheet No. | |
|-----------|------------|
| Customer | |
| Item No. | |
| Date | 2017-03-07 |

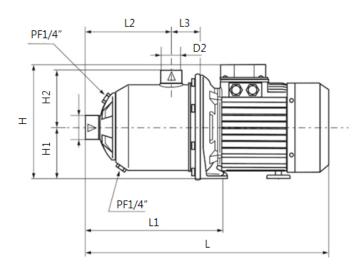



단위 : mm

| Power Source | Н | H1 | H2 | L | L1 | L2 | L3 | L4 | D1 | D2 |
|---------------------|--|---|--|--|--|--|---|--|--|----|
| | 200 | 90 | 104 | 354 | 204 | 109.5 | 51 | 106 | 30 | 25 |
| M (1~ 220V 60Hz) | 200 | 90 | 104 | 380 | 204 | 109.5 | 51 | 106 | 30 | 25 |
| (2 , 220),001 12, | 228 | 90 | 104 | 428 | 252 | 157.5 | 51 | 120 | 30 | 25 |
| т | 192 | 90 | 104 | 354 | 204 | 109.5 | 51 | - | 30 | 25 |
| (3~,220/380, | 223 | 90 | 104 | 380 | 204 | 109.5 | 51 | - | 30 | 25 |
| 60Hz) | 223 | 90 | 104 | 428 | 252 | 157.5 | 51 | - | 30 | 25 |
| N | 223 | 90 | 104 | 428 | 252 | 157.5 | 51 | - | 30 | 25 |
| (3~,440V,60Hz) | 223 | 90 | 104 | 428 | 276 | 181.5 | 51 | - | 30 | 25 |
| | M (1~, 220V,60Hz) I (3~,220/380, 60Hz) | M (1~, 220V,60Hz) 200 228 I 192 (3~,220/380, 60Hz) 223 N 223 (3~.440V,60Hz) | M (1~, 220V,60Hz) 200 90 228 90 192 90 (3~,220/380, 60Hz) 223 90 N 223 90 (3~,440V,60Hz) | M (1~, 220V,60Hz) 200 90 104 228 90 104 192 90 104 192 90 104 (3~,220/380, 60Hz) 223 90 104 N 223 90 104 (3~,440V,60Hz) | M (1~, 220V,60Hz) 200 90 104 354 200 90 104 380 228 90 104 428 192 90 104 354 354 354 354 354 354 354 354 354 35 | M (1~, 220V,60Hz) 200 90 104 354 204 208 90 104 380 204 228 90 104 428 252 192 90 104 380 204 204 200 228 90 104 354 204 204 204 200 223 90 104 380 204 200 223 90 104 428 252 N 223 90 104 428 252 (3~,440V,60Hz) | M (1~, 220V,60Hz) 200 90 104 354 204 109.5 228 90 104 428 252 157.5 I (3~,220/380, 60Hz) 223 90 104 428 252 157.5 N 223 90 104 428 252 157.5 (3~,440V,60Hz) 223 90 104 428 252 157.5 | 200 90 104 354 204 109.5 51 (1~, 220V,60Hz) 200 90 104 380 204 109.5 51 228 90 104 428 252 157.5 51 192 90 104 354 204 109.5 51 (3~,220/380, 60Hz) 223 90 104 380 204 109.5 51 N 223 90 104 428 252 157.5 51 (3~,440V,60Hz) 223 90 104 428 252 157.5 51 (3~,440V,60Hz) 200 200 200 200 200 200 104 109.5 51 200 200 200 200 105 105 105 200 200 200 200 106 107 109.5 51 107 109.5 51 108 109.5 51 109 109 109 109 109 109 109 109 109 109 109 109 109 109 109 109 109 109 109 109 109 109 109 109 109 109 109 109 109 109 109 109 109 109 109 109 109 109 | N 223 90 104 354 204 109.5 51 106 104 207 207 207 207 207 207 105 228 90 104 428 252 157.5 51 120 105 228 90 104 354 204 109.5 51 - 107 105 228 90 104 354 204 109.5 51 - 107 105 228 90 104 380 204 109.5 51 - 107 105 228 90 104 428 252 157.5 51 - 107 105 228 90 104 428 252 157.5 51 - 107 105 228 90 104 428 252 157.5 51 - 107 105 228 228 228 228 228 238 238 105 228 238 238 238 238 238 105 238 238 238 238 238 105 238 238 238 238 238 105 238 238 238 238 105 238 238 238 238 105 238 238 238 238 105 238 238 238 105 238 238 238 105 238 238 105 238 238 105 238 238 105 238 238 105 238 238 105 238 238 105 238 238 105 238 238 105 238 238 105 238 238 105 238 10 | N |

| TYPE | Horizontal Multi-stage |
|---------|------------------------|
| MODEL | MHI-406i |
| SERVICE | |
| | |